
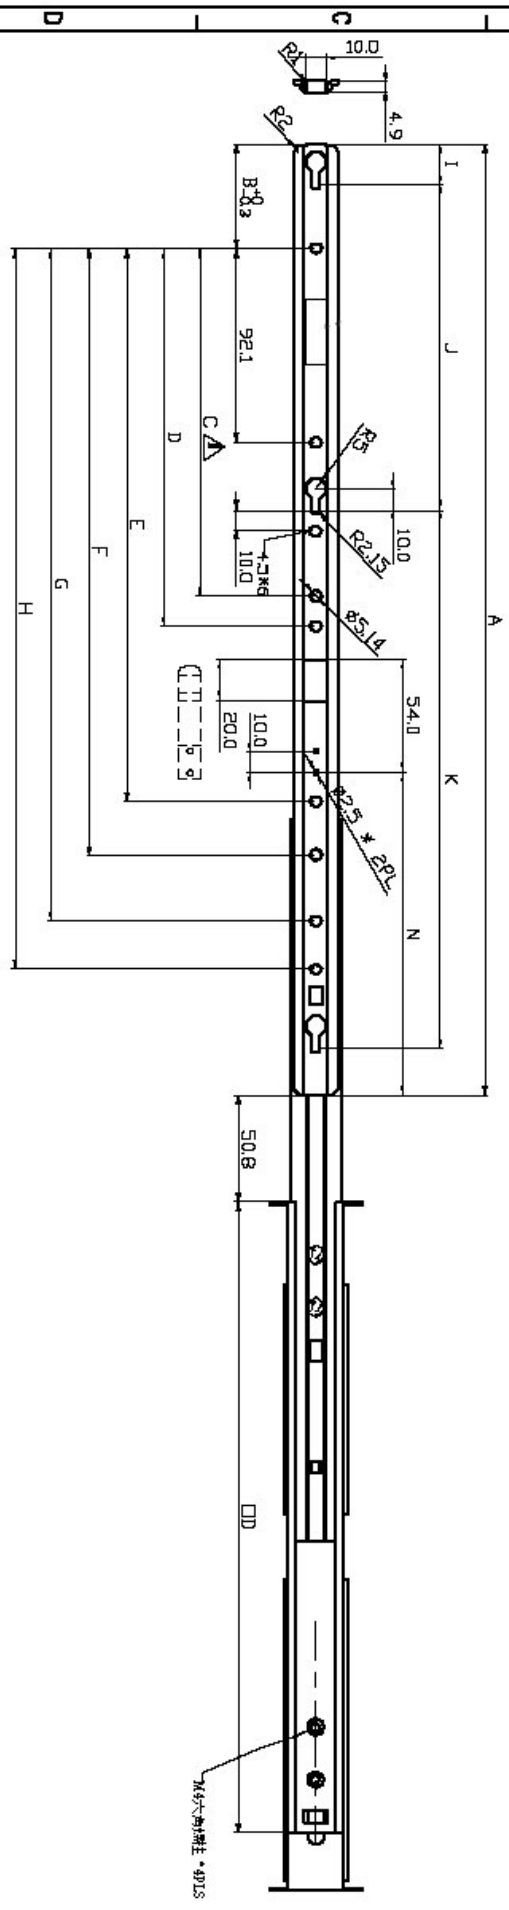


REV	DATE	LOC	DESCRIPTION	REV
△			增加穿线孔，便于穿线	

NOTES:
 1. MATERIAL: SLIDE MEMBERS AND COMPONENT PARTS
 WORK - HARDENED, COLD - ROLLED STEEL
 2. LUBRICANT: ANTIWEAR AND EXTREME PRESSURE PROPERTIES
 3. FINISH: ELECTRO - ZINC PLATED
 CHROMATIC COATED CLEAR OR BLACK
 4. PULL FORCE: 2.25 HOOKS
 5. TOLERANCES ARE FOLLOWS UNLESS OTHERWISE SPECIFIED.

XX 400
 X 506
 HOLES 406
 ANGLE 45°

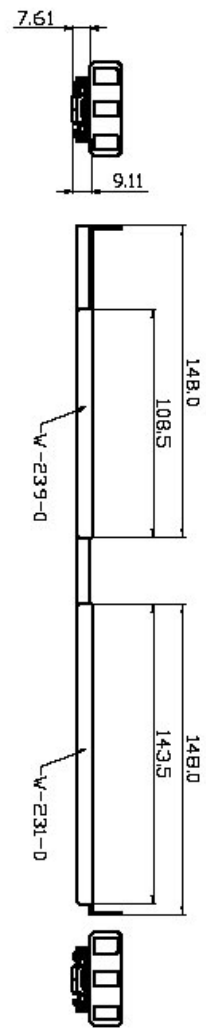

SLIDE LENGTH	A	B	C	D	E	F	G	H	SLIDE LENGTH	I	J	K	L	OD	N
18"	456.0	89.66			276.3				18"					437.0	143.55
20"	507.0	89.66	134.2		368.4				20"					509.0	158.55
22"	558.0	89.66	134.2		368.4				22"					559.0	183.55
24"	609.0	89.66	134.2		368.4	480.5			24"					610.0	208.55
26"	659.0	89.66	134.2		276.3	480.5	552.6		26"	19.00	163.20	460.30		660.0	233.55
28"	710.0	89.66	134.2		276.3	480.5	552.6		28"	19.00	163.20	460.30	172.00	711.0	258.55
30"	761.0	89.66	134.2		276.3	480.5	552.6	644.7	30"					762.0	283.55

单位: mm

DRW:	DATE:	MATERIAL:	MODEL:	TITLE:
CMD:	CUSTOMER P/N:	CC-40	P/N: 13002451	DRAWING ASSY
APPD:	CUSTOMER:	FINISH:	D/N:	SHEET 1 OF 1 REV. B1
		ZN		
		SCALE: 1:1		
		UNIT: mm		
		CLASS:		

AMERI-RACK TECHNOLOGY, INC.