

DC FAN MOTER

SAN ACE 40mm

COUNTER ROTATING FAN



General specifications

- Motor protection system ... Current Cut System (with reverse polarity protection)
- Dielectric Strength50/60Hz,500VAC,1minute
(between lead conductor and frame)
- Operating Temperature ... -10°C to+60°C (Non-condensing)
- Life Expectancy40,000 hours
(Survival Rate 90% at 60°C,
rated voltage and continuously run in a free air state)
- Lead WiresUL1007 AWG#28
INLET FAN ⊕ red, ⊖ black (sensor) yellow
OUTLET FAN ⊕ orange, ⊖ gray (sensor) purple





56mm thickness




Specifications

Model No	Rated voltage (V)	Operating voltage range (V)	Rated current (A)	Rated input (W)	Rated rotating speed (min ⁻¹)		Air flow		Static pressure (Pa)	Noise (dB[A])	Mass (g)
					INLET FAN	OUTLET FAN	(m ³ /min)	(CFM)			
9CR0412H501	12	10.8~13.2	0.72	8.64	13,300	9,300	0.59	20.8	320	54	90
9CR0412S501			1.1	13.2	15,800	10,600	0.7	24.7	450	57.5	

Performance Curves

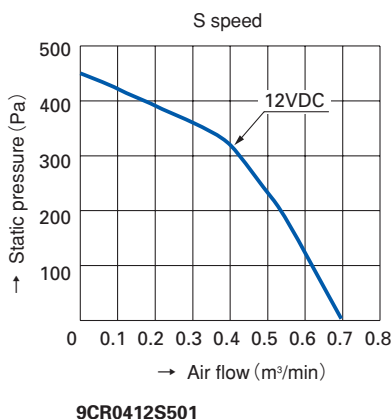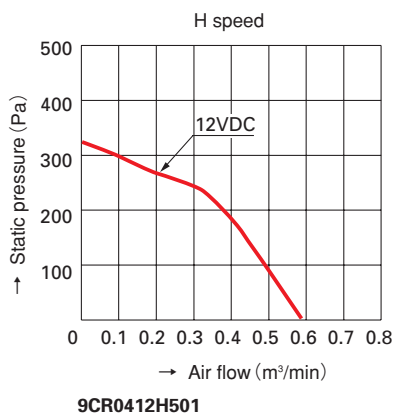

Dimensions (unit : mm)

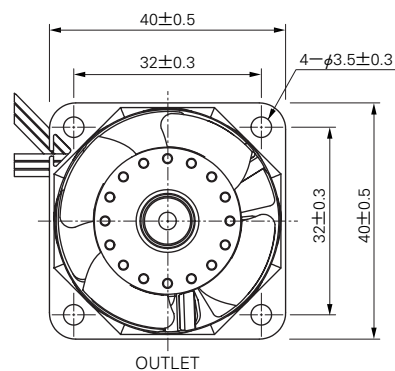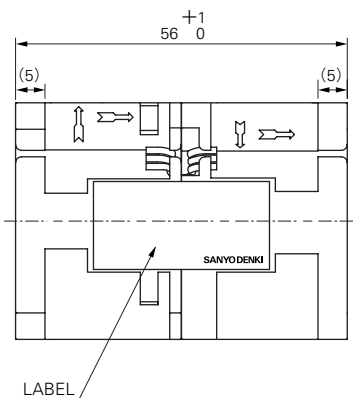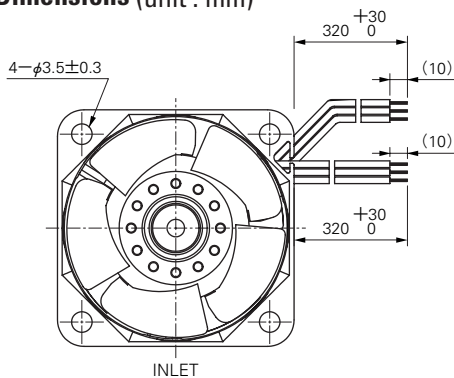

40mm

SANYO DENKI CO., LTD.

本社 〒170-8451 東京都豊島区北大塚1-15-1 電話(03) 3917 5151(大代)

Headquarters 1-15-1, KITA OTSUKA, TOSHIMA-KU, TOKYO, JAPAN Phone : +81 3 3917 2223 Fax : +81 3 3917 4521

Home Page:<http://www.sanyodenki.co.jp>

Rev.A